

Stock No.553


## I - beam type straight edge

- These straightedges can be used for measurements of flatness, parallelism, and straightness.
- Two types (Hardened, Without hardening) are available.

■ Dimensional drawing Unit : mm



\* For models of size 1500 mm or more, slots are made in the main bodies to hold them easily.

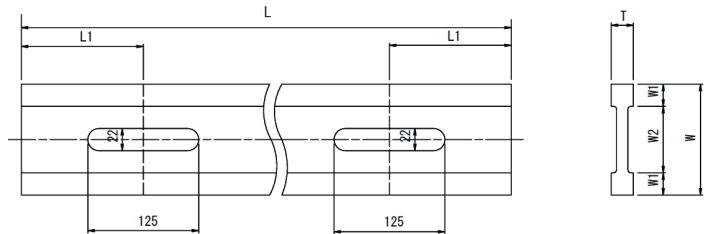


呼び	L	W	T	W1	W2	L1
500	500	50	10	10	30	—
750	750	50	10	10	30	—
1000	1000	60	12	12	36	—
1500	1500	70	15	12	46	335
2000	2000	90	18	16	58	446
2500	2500	100	18	18	64	558
3000	3000	120	22	20	80	670
3500	3500	130	22	20	90	780
4000	4000	140	25	20	100	892

Material : S50C

Package : Package Wooden box

Accessories: Certificate of inspection, and Instruction manual

### Configuration of stock number



Product No	Stock No	Size	Straightness (μm)	Weight (kg)
36-1-0500	553-0500Q	500	7.0	1.5
36-2-0500	553-0500A			
36-1-0750	553-0750Q	750	9.5	3.2
36-2-0750	553-0750A			
36-1-1000	553-1000Q	1000	12.0	5.0
36-2-1000	553-1000A			
36-1-1500	553-1500Q	1500	17.0	8.5
36-2-1500	553-1500A			
36-1-2000	553-2000Q	2000	22.0	18.5
36-2-2000	553-2000A			
36-1-2500	553-2500Q	2500	27.0	25.0
36-2-2500	553-2500A			
36-1-3000	553-3000Q	3000	32.0	44.0
36-2-3000	553-3000A			
36-1-3500	553-3500Q	3500	37.0	55.0
36-2-3500	553-3500A			
36-1-4000	553-4000Q	4000	42.0	75.0
36-2-4000	553-4000A			