


Stock No.594

Precision straight edge (type - I)

- These straightedges can be used for measurements of flatness, parallelism, and straightness.
- Two types (Hardened, Without hardening) are available.
- Two accuracy grades (Grades A and B) are available.

■ Dimensional drawing Unit : mm

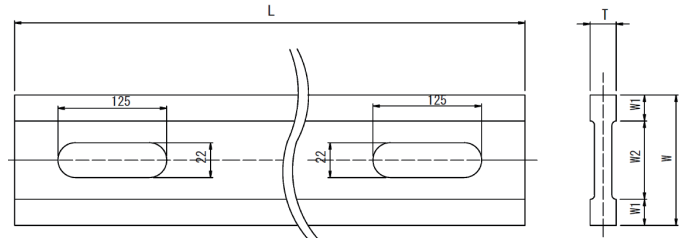

The actual length of these straightedges is the effective length plus 40 mm. When using them, take a 20-mm margin on both sides into consideration.

- A special grade with accuracy better than Grade A is also available by request.

* Exclude the 20-mm margin on both sides from the measured values.

- * For models of size 1500 mm or more, slots are made in the main bodies to hold them easily.


呼び	L	W	T	W1	W2
300	340	50	10	10	30
500	540	50	10	10	30
1000	1040	60	12	12	36
1500	1540	70	15	12	46
2000	2040	90	20	16	58
3000	3040	120	22	20	80

Material : SKS3

Package : Wooden box

Accessories: Certificate of inspection, and Instruction manual

Configuration of stock number

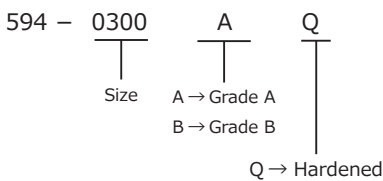

Product No	Stock No	Size	Straightness and parallelism (μm)	Squareness of measurement surface to sides surface (±μm)	Weight (kg)
38-1-0300	594-0300AQ	300	3.2	30.0	1.3
38-2-0300	594-0300A				
38-3-0300	594-0300BQ		10.0	100.0	
38-4-0300	594-0300B				
38-1-0500	594-0500AQ	500	4.0	30.0	2.1
38-2-0500	594-0500A				
38-3-0500	594-0500BQ		14.0	100.0	
38-4-0500	594-0500B				
38-1-1000	594-1000AQ	1000	6.0	40.0	5.8
38-2-1000	594-1000A				
38-3-1000	594-1000BQ		24.0	150.0	
38-4-1000	594-1000B				
38-1-1500	594-1500AQ	1500	8.0	50.0	12.6
38-2-1500	594-1500A				
38-3-1500	594-1500BQ		34.0	200.0	
38-4-1500	594-1500B				
38-1-2000	594-2000AQ	2000	10.0	60.0	28.8
38-2-2000	594-2000A				
38-3-2000	594-2000BQ		44.0	250.0	
38-4-2000	594-2000B				
38-1-3000	594-3000AQ	3000	14.0	70.0	63.0
38-2-3000	594-3000A				
38-3-3000	594-3000BQ		64.0	300.0	
38-4-3000	594-3000B				