

Stock No.595

Rectangular shape straight edge

- These straightedges can be used for measurements of flatness, parallelism, and straightness.
- Two types (Hardened, Without hardening) are available.
- Two accuracy grades (Grades A and B) are available.




The actual length of these straightedges is the effective length plus 40 mm. When using them, take a 20-mm margin on both sides into consideration.

- A special grade with accuracy better than Grade A is also available by request.

* Exclude the 20-mm margin on both sides from the measured values.


■ Dimensional drawing Unit : mm

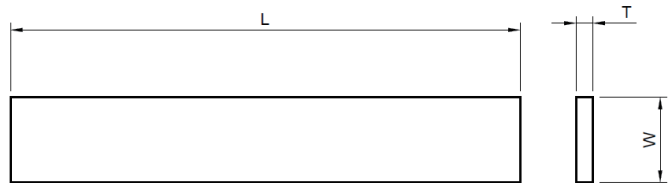

Size	L	W	T
300	340	50	10
500	540	50	10
1000	1040	60	12
1500	1540	70	15
2000	2040	90	20
3000	3040	120	22

Material : SKS3
 Package : Wooden box
 Accessories: Certificate of inspection, and Instruction manual

Configuration of stock number

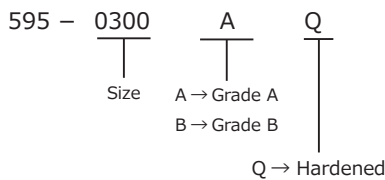

Product No	Stock No	Size	Straightness and parallelism (μm)	Squareness of measurement surface to sides surface (±μm)	Weight (kg)
39-1-0300	595-0300AQ	300	3.2	30.0	1.3
39-2-0300	595-0300A			100.0	
39-3-0300	595-0300BQ		10.0	100.0	
39-4-0300	595-0300B				
39-1-0500	595-0500AQ	500	4.0	30.0	2.1
39-2-0500	595-0500A			100.0	
39-3-0500	595-0500BQ		14.0	100.0	
39-4-0500	595-0500B				
39-1-1000	595-1000AQ	1000	6.0	40.0	5.8
39-2-1000	595-1000A			150.0	
39-3-1000	595-1000BQ		24.0	150.0	
39-4-1000	595-1000B				
39-1-1500	595-1500AQ	1500	8.0	50.0	12.6
39-2-1500	595-1500A			200.0	
39-3-1500	595-1500BQ		34.0	200.0	
39-4-1500	595-1500B				
39-1-2000	595-2000AQ	2000	10.0	60.0	28.8
39-2-2000	595-2000A			250.0	
39-3-2000	595-2000BQ		44.0	250.0	
39-4-2000	595-2000B				
39-1-3000	595-3000AQ	3000	14.0	70.0	63.0
39-2-3000	595-3000A			300.0	
39-3-3000	595-3000BQ		64.0	300.0	
39-4-3000	595-3000B				