


# UNT GY series 転造ボールネジ

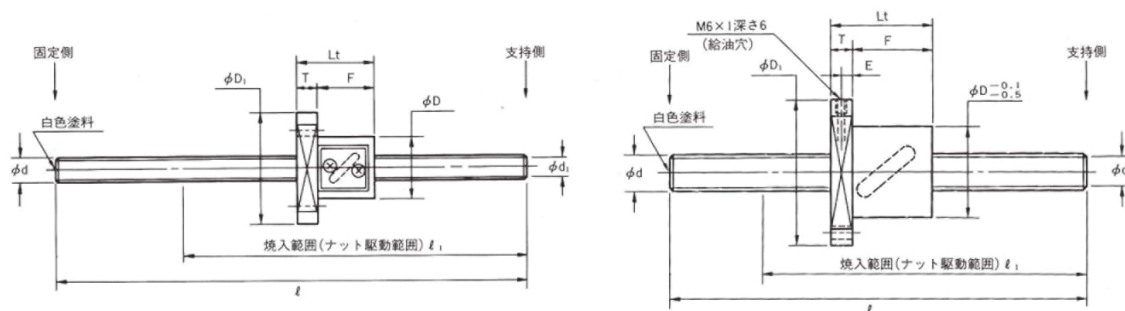

## GYシリーズ 軸端追加加工用のねじ軸寸法表

| 呼 び 番 号              | ねじ軸<br>外 径 | リード  | ねじ部<br>長さ      | ね じ 軸<br>全長 | 谷径             | 外径    | ナ<br>全長 | ツ<br>胴長 | ト<br>厚さ | 外径             |
|----------------------|------------|------|----------------|-------------|----------------|-------|---------|---------|---------|----------------|
|                      | d          | L    | ℓ <sub>1</sub> | ℓ           | d <sub>1</sub> | D     | Lt      | F       | T       | D <sub>1</sub> |
| GY0802GS-HGNR-0200 A | 8          | 2    | 145            | 200         | (6.6)          | 20    | 28      | 22      | 6       | 40             |
| 0400                 |            |      | 345            | 400         |                |       |         |         |         |                |
| GY102FGS-HGNR-0400 A | 10         | 2.5  | 340            | 400         | (8.2)          | 24    | 32      | 24      | 8       | 44             |
| 0600                 |            |      | 540            | 600         |                |       |         |         |         |                |
| GY1004DS-HANR-0400 A | 10         | 4    | 340            | 400         | (7.8)          | 26    | 34      | 26      | 8       | 46             |
| 0600                 |            |      | 540            | 600         |                |       |         |         |         |                |
| GY1204DS-HANR-0400 A | 12         | 4    | 340            | 400         | (10.0)         | 30    | 35      | 27      | 8       | 50             |
| 0800                 |            |      | 740            | 800         |                |       |         |         |         |                |
| GY1210AS-HULR-0400 A |            | 10   | 10             | 340         | 400            | (9.6) | 30      | 44      | 32      | 12             |
| 0800                 | 740        |      |                | 800         |                |       |         |         |         |                |
| GY1505DS-HULR-0600 A | 15         |      |                | 5           | 540            |       |         |         |         |                |
| 1200                 |            | 1140 | 1200           |             |                |       |         |         |         |                |
| GY1510DS-HULR-0600 A |            | 10   | 540            | 600         | (12.5)         | 34    | 52      | 42      | 10      | 57             |
| 1200                 |            |      | 1140           | 1200        |                |       |         |         |         |                |
| GY1520BS-HULR-0600 A |            | 20   | 540            | 600         | (12.5)         | 34    | 59      | 49      | 10      | 57             |
| 1200                 |            |      | 1140           | 1200        |                |       |         |         |         |                |
| GY2005DS-HULR-0600 A | 20         | 5    | 520            | 600         | (17.5)         | 40    | 40      | 30      | 10      | 60             |
| 1200                 |            |      | 1120           | 1200        |                |       |         |         |         |                |
| 2000                 |            | 1920 | 2000           |             |                |       |         |         |         |                |
| GY2010DS-HULR-0600 A |            | 10   | 520            | 600         | (16.3)         | 52    | 57      | 45      | 12      | 82             |
| 1200                 |            |      | 1120           | 1200        |                |       |         |         |         |                |
| 2000                 |            |      | 1920           | 2000        |                |       |         |         |         |                |
| GY2020DS-HULR-0600 A | 20         | 20   | 520            | 600         | (17.5)         | 39    | 78      | 68      | 10      | 62             |
| 1200                 |            |      | 1120           | 1200        |                |       |         |         |         |                |
| 2000                 |            |      | 1920           | 2000        |                |       |         |         |         |                |
| GY2505DS-HULR-1000 A | 25         | 5    | 890            | 1000        | (21.8)         | 43    | 40      | 30      | 10      | 67             |
| 2000                 |            |      | 1890           | 2000        |                |       |         |         |         |                |
| 2500                 |            | 2390 | 2500           |             |                |       |         |         |         |                |
| GY2510ES-HULR-1000 A |            | 10   | 890            | 1000        | (20.3)         | 60    | 92      | 77      | 15      | 96             |
| 2000                 |            |      | 1890           | 2000        |                |       |         |         |         |                |
| 2500                 |            |      | 2390           | 2500        |                |       |         |         |         |                |
| GY2525DS-HULR-1000 A | 25         | 25   | 890            | 1000        | (21.5)         | 47    | 96      | 84      | 12      | 74             |
| 2000                 |            |      | 1890           | 2000        |                |       |         |         |         |                |
| 2500                 |            |      | 2390           | 2500        |                |       |         |         |         |                |

注) 1. 1520はナットねじ溝が2条になっています。 2. ワイバの種類 L: リップシール 3. 軸端加工図に準じて製作します。