


試作・部品加工

●精密部品加工



材質 SKS3 15×120×200

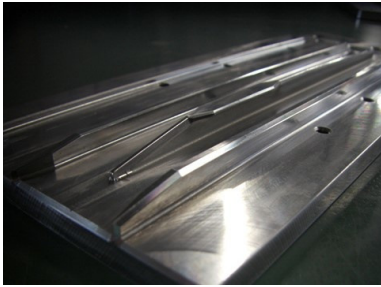

材質 SCM415 $\phi 26 \times 60$



材質 デンスバー 40×150×200



材質 NAK55 $\phi 15 \times 20$



材質 A7050 $\phi 60 \times 40$

●金型加工



材質 DC53 $\phi 120 \times 100$



材質 DC53 $\phi 65 \times 160$




材質 DC53 36×40×80

●CAD・CAM加工



材質 S50C 400×450×550

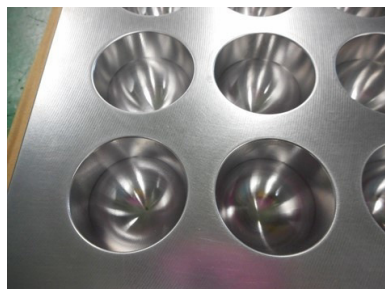


材質 S50C 40×300×400



材質 SUS304 $\phi 100 \times 400$

●鋳型・製缶品加工

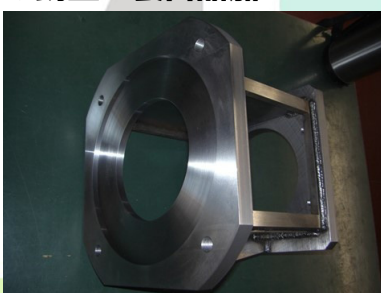

溶接後の仕上げ加工



溶接後の仕上げ加工



溶接後の仕上げ加工