

Stock No.553

I - beam type straight edge


Traceability can be issued.

- These straightedges can be used for measurements of flatness, parallelism, and straightness.
- Two types (Hardened, Without hardening) are available.
- *This product is only available in "Grade A" only.

$$\text{formula } \pm \left(2 + \frac{\ell}{100} \right) \mu\text{m} \quad \ell = \text{Size}$$



* For models of size 1500 mm or more, slots are made in the main bodies to hold them easily.

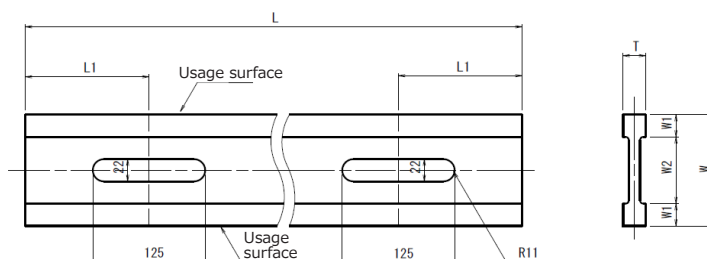

Size	L	W	T	T1	W1	W2	L1
500	500	50	10	6	10	30	—
750	750	50	10	6	10	30	—
1000	1000	60	12	8	12	36	—
1500	1500	70	15	8	12	46	335
2000	2000	90	18	10	16	58	446

Material : S50C

Package : Cardboard Box(500 ~ 1000)

Wooden Box(1500 ~)

Accessories : Certificate of inspection, and Instruction manual

Configuration of stock number

553 05000 Q

 | |

 Size Q → Hardened

 A → Without hardening

Product No	Stock No	Size (mm)	Straightness (μm)	Weight (kg)
36-1-0500	553-0500Q	500	7.0	1.5
36-2-0500	553-0500A			
36-1-0750	553-0750Q	750	9.5	3.2
36-2-0750	553-0750A			
36-1-1000	553-1000Q	1000	12.0	5.0
36-2-1000	553-1000A			
36-1-1500	553-1500Q	1500	17.0	8.5
36-2-1500	553-1500A			
36-1-2000	553-2000Q	2000	22.0	18.5
36-2-2000	553-2000A			