

Stock No.554A,554B

Wide type straight edge



Traceability can be issued.

- These straightedges have end panels 50 mm in width.
- By putting a level on them, the horizontality between two points can be measured.
- Two accuracy grades (Grades A and B) are available.
- Two types (Hardened, Without hardening) are available.

ℓ = Size

Straightness formula JIS A class $\pm \left(2 + \frac{\ell}{250} \right) \mu\text{m}$

Straightness formula JIS B class $\pm \left(4 + \frac{\ell}{50} \right) \mu\text{m}$

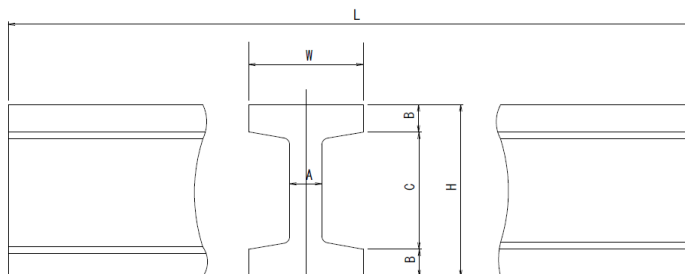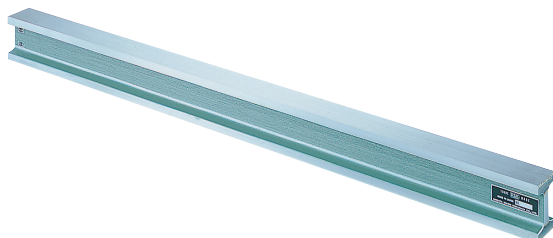

* For models of size 1500 mm or more, slots are made in the main bodies to hold them easily.

	L	H	W	A	B	C
1000	1000	75		14	12	51
1500	1500	90	50			66
2000	2000	120		15	13	94

Material : S50C

Package : Cardboard Box(1000)

Wooden Box(1500 ~)

Accessories : Certificate of inspection, and Instruction manual

Configuration of stock number

554 - 1000 A Q

Size A → Grade A
B → Grade B
Q → Hardened

Product No	Stock No	Size (mm)	squareness (μm)	Weight (kg)
37-1-1000	554-1000AQ	1000	6.0	16
37-2-1000	554-1000A			
37-3-1000	554-1000BQ		24.0	
37-4-1000	554-1000B			
37-1-1500	554-1500AQ	1500	8.0	26
37-2-1500	554-1500A			
37-3-1500	554-1500BQ		34.0	
37-4-1500	554-1500B			
37-1-2000	554-2000AQ	2000	10.0	43
37-2-2000	554-2000A			
37-3-2000	554-2000BQ		44.0	
37-4-2000	554-2000B			