



Stock No.554

## Wide type straight edge

- These straightedges have end panels 50 mm in width.
- By putting a level on them, the horizontality between two points can be measured.
- Two accuracy grades (Grades A and B) are available.
- Two types (Hardened, Without hardening) are available.

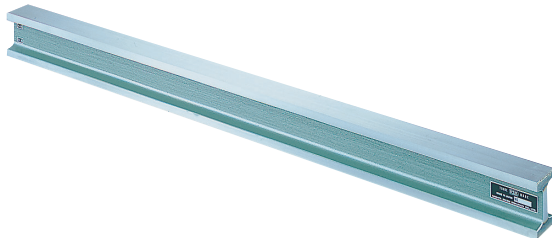

■ Dimensional drawing Unit : mm

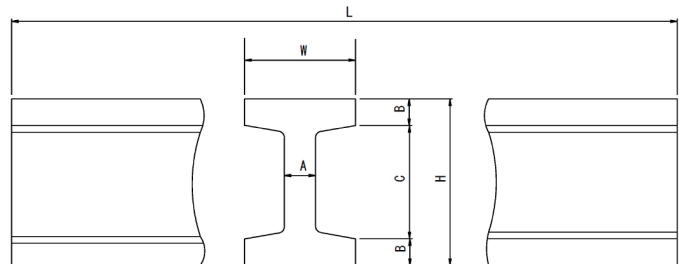

\* For models of size 1500 mm or more, slots are made in the main bodies to hold them easily.


#	L	H	W	A	B	C
1000	1000	75	50	14	12	51
1500	1500	90		13	15	66
2000	2000	120		16	18	94
2500	2500	140		15	15	110
3000	3000	180	16	16	148	
4000	4000	200		16	18	164

Material : S50C

Package : Wooden box

Accessories: Certificate of inspection, and Instruction manual

### Configuration of stock number

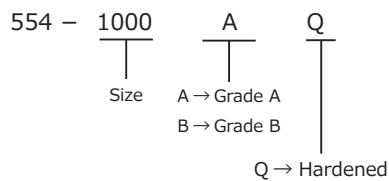

Product No	Stock No	Size	Straightness (μm)	Weight (kg)
37-1-1000	554-1000AQ	1000	6.0	16
37-2-1000	554-1000A		24.0	
37-3-1000	554-1000BQ			
37-4-1000	554-1000B			
37-1-1500	554-1500AQ	1500	8.0	26
37-2-1500	554-1500A		34.0	
37-3-1500	554-1500BQ			
37-4-1500	554-1500B			
37-1-2000	554-2000AQ	2000	10.0	43
37-2-2000	554-2000A		44.0	
37-3-2000	554-2000BQ			
37-4-2000	554-2000B			
37-1-2500	554-2500AQ	2500	12.0	63
37-2-2500	554-2500A		54.0	
37-3-2500	554-2500BQ			
37-4-2500	554-2500B			
37-1-3000	554-3000AQ	3000	14.0	90
37-2-3000	554-3000A		64.0	
37-3-3000	554-3000BQ			
37-4-3000	554-3000B			
37-1-4000	554-4000AQ	4000	18.0	140
37-2-4000	554-4000A		84.0	
37-3-4000	554-4000BQ			
37-4-4000	554-4000B			