

リニアベアリング

—ダブルタイプ—



品 名	外 筒			ボール	保持器
	材 質	硬 度	表面処理	材 質	材 質
LAW (LMUW)	SUJ2	HRC58~	——	SUJ2	合成樹脂 (ジュラコン)
MLAW (LMUWM)			無電解 ニッケルメッキ	SUS440C	

注:カッコ内は互換性品。



(両シール付)

LAW
MLAW

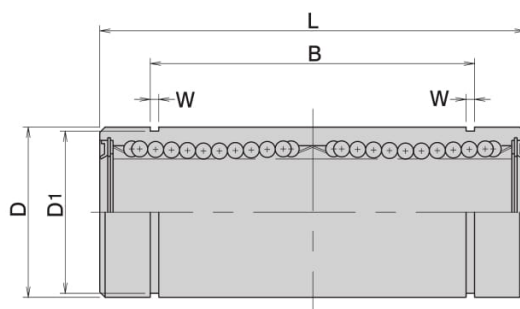

Catalog No.			D		L		B		W	D ₁	基本定格荷重		質量 (g)
品 名	dr	許容差		許容差		許容差		許容差			C (動) N	Co (静) N	
LAW (LMUW)	6	0 -0.010	12	0	35	0 -0.3	27	0 -0.3	1.1	11.5	323	530	16
	8		15	-0.013	45		35		1.1	14.3	431	784	31
	10		19	0	55		44		1.3	18	588	1,100	62
	12		21		0		57		46	1.3	20	813	1,570
	13		23	-0.016	61		46		1.3	22	813	1,570	90
	16		28	70	53		1.6		27	1,230	2,350	145	
	20	0 -0.012	32	0	80	0 -0.4	61	0 -0.4	1.6	30.5	1,400	2,740	180
	25		40	-0.019	112		82		1.85	38	1,560	3,140	440
	30		45	0	123		89		1.85	43	2,490	5,490	480
	35		52		0		135		99	2.1	49	2,650	6,270
	40		60	-0.022	151		121		2.1	57	3,430	8,040	1,170
	50		80	192	148		2.6		76.5	6,080	15,900	3,100	

注:カッコ内は互換性品

注文例 Catalog No.
LAW20